

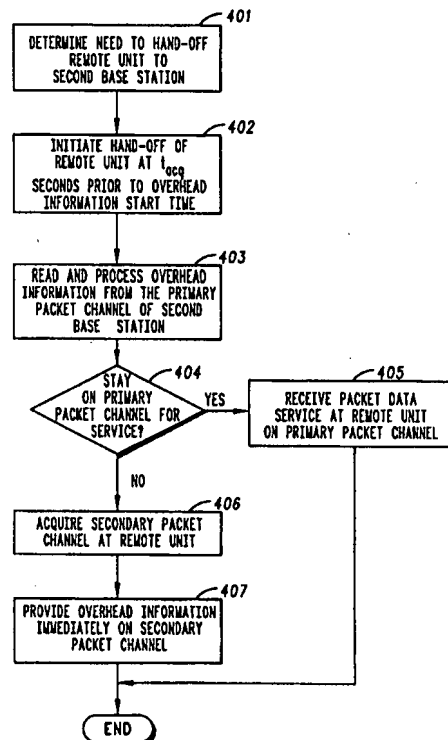


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04Q 7/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/23840</b> <b>(43) International Publication Date:</b> 14 May 1999 (14.05.99)
<b>(21) International Application Number:</b> PCT/US98/16656 <b>(22) International Filing Date:</b> 10 August 1998 (10.08.98) <b>(30) Priority Data:</b> 08/962,581 31 October 1997 (31.10.97) US <b>(71) Applicant:</b> MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). <b>(72) Inventors:</b> JAYAPALAN, Jay, Purushothaman; 1215 Brandywyn Lane, Buffalo Grove, IL 60089 (US). SANDERS, Steven, H., III; 5871 North Kolmar Avenue, Chicago, IL 60646 (US). <b>(74) Agents:</b> MACINTYRE, John, B. et al.; Motorola Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).		<b>(81) Designated States:</b> BR, CA, CN, DE, FI, GB, IL, JP, KR, SE.  <b>Published</b> <i>With international search report.</i>

**(54) Title:** METHOD OF HANDING-OFF A REMOTE UNIT BASED ON OVERHEAD INFORMATION START TIMES**(57) Abstract**

The present invention provides a method of handing-off a remote unit (113) from a first base station (101) to a second base station (102). The remote unit (113) communicates with the first base station (101) and establishes communication with a second base station (102). It is then determined, preferably by the remote unit (113), that the remote unit (113) should hand-off to the second base station (102). An overhead information start time is then determined. The remote unit (102) may determine when the overhead information will be broadcast by the second base station (102), thereby establishing an overhead information start time. The overhead information start time is the time when overhead information will be transmitted from the second base station (102). The first base station (101) and the second base station (102) may be synchronized to transmit the overhead information at approximately the same time. In this manner, the remote unit (102) can determine the overhead information start time at the second base station (102) by monitoring the overhead information start time at the first base station (101). The remote unit (113) is then handed off to the second base station (102) based upon the overhead information start time.



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CJ	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## 5 Field of the Invention

10

15 Digital Cellular Systems are beginning to offer multiple  
bearer services that concurrently utilize a common  
infrastructure. Mobile stations, commonly referred to as  
remote units, also support multiple bearer service capabilities.  
For different bearer services, there can be different divisions  
of the hand-off functions between the mobile stations and the  
20 cellular infrastructure. As used herein, hand-off refers to the  
process of transitioning a remote unit from a first base station  
to a second base station. For example, when the mobile station  
is operating on an infrastructure-assigned traffic channel, such  
as for voice or circuit-switched data, the infrastructure will  
25 control hand-off of the remote unit. This hand-off can happen  
with input from the remote unit, or independent of the remote  
unit. In other cases, where the remote unit is using a shared  
channel, such as for packet-based data, control and access  
channels, or short message services, the remote unit may  
30 control the hand-off autonomously.

For autonomous remote unit hand-offs, as a remote unit hands off to another RF entity, such as an adjacent cell, the remote unit needs to acquire information concerning the new cell. Examples of such information include the configuration of the cell, the configuration of services at the new cell, or other

configuration parameters. In some cases, the remote unit may need to acquire such information multiple times. This may occur when a cell that has more than one channel is assigned to transport packet data activity. A user that is handing-off into that cell will first obtain the overhead information from the primary channel assigned to packet data and then will determine, based on the primary channel overhead information, the specific secondary packet data channel it must use. The remote unit will then obtain the overhead information from the secondary packet data channel prior to beginning operation on the secondary channel. It is important to minimize the time required to complete the hand-off, especially for data services where any data that is lost or misdelivered during hand-off must be re-transmitted.

Consequently, a need exists for a method for handing-off a remote unit that must obtain overhead information from the target cell and minimizing the time required to perform the hand-off in order to minimize the amount of data that is delayed or lost during the hand-off.

### Brief Description of the Drawings

FIG. 1 depicts a wireless communication system in accordance with a preferred embodiment of the present invention;

FIG. 2 depicts the overhead information start time operation of the communication system of FIG. 1 in accordance with the preferred embodiment of the present invention;

FIG. 3 depicts the overhead information start time operation of the communication system of FIG. 1 in accordance with an alternate embodiment of the present invention; and

FIG. 4 is a flow chart illustrating operation of the communication system of FIG. 1 in accordance with the preferred embodiment of the present invention.

## Detailed Description of a Preferred Embodiment

5       The present invention provides a method of handing-off a remote unit from a first base station to a second base station. The remote unit communicates with the first base station. The remote unit establishes communication with a second base station. It is then determined, preferably by the remote unit,  
10   that the remote unit should hand-off to the second base station. An overhead information start time, which is the time when overhead information will be transmitted from the second base station, is then determined. In a preferred embodiment, the remote unit determines when the overhead information will be  
15   broadcast by the second base station, thereby establishing an overhead information start time. In an alternate embodiment, the first base station and the second base station are synchronized to transmit the overhead information at approximately the same time. In this manner, the remote unit  
20   can determine the overhead information start time at the second base station by monitoring the overhead information start time at the first base station. The remote unit is then handed off to the second base station based upon the overhead information start time.

25       The present invention can be better understood with reference to FIGs. 1-4. In accordance with a preferred embodiment of the present invention, FIG. 1 depicts a wireless communication system 100. Communication system 100 is preferably a Personal Digital Cellular (PDC) system, but may  
30   alternately be any other digital cellular communication system such as Code Division Multiple Access (CDMA), Group Special Mobile (GSM) systems, Time Division Multiple Access (TDMA), next generation CDMA, the next-generation CDMA protocols, including direct sequence spread spectrum or slow frequency  
35   hopping spread spectrum systems. Communication system 100

includes first base station 101, second base station 102, remote unit 113, Centralized Base Station Controller (CBSC) 103, and Mobile Switching Center (MSC) 104. Communication system 100 could also include additional base stations, but two are shown for clarity. Remote unit 113, first base station 101, and second base station 102 each include a logic unit that can process information, such as determinations of overhead information start times and a need to hand-off remote unit 113.

10 In the preferred embodiment of the present invention, base stations 101 and 102 are Motorola SC9600 base stations, MSC 104 is a Motorola EMX2500 MSC, and CBSC 103 is a Motorola SG1128BF CBSC component. As shown, remote unit 113 is communicating with base stations 101 and 102 via uplink communication signals 119, and base stations 101 and 102 are communicating with remote unit 113 via downlink communication signals 116. In the preferred embodiment, base stations 101 and 102 are suitably coupled to CBSC 103, and CBSC 103 is suitably coupled to MSC 104.

20 Preferred operation of communication system 100 occurs as follows: Remote unit 113 accesses first base station 101. Typically, this is accomplished by scanning for the strongest signals and acquiring synchronization channels or information on the overhead channels broadcast by base station 101. During communication with first base station 101, remote unit 113 acquires a signal from second base station 102. Upon a predetermined condition, such as receiving a stronger signal from second base station 102, it is determined to hand-off remote unit 113 to second base station 102. This determination can be accomplished at remote unit 113, first base station 101, or second base station 102. Base stations 101 and 102 both transmit overhead information. It is desired to have remote unit 113 hand-off to second base station 102 in such a manner as to minimize the time before the remote unit 113 can obtain the overhead information from base station 102.

When base station 102 has more than one channel assigned to the service being used by remote unit 113, remote unit 113 will obtain the overhead information from the primary channel providing the service in base station 102. Based on the  
5 overhead information from the primary channel, remote unit 113 will transition to the assigned secondary channel and obtain the overhead information from the secondary channel.

Two embodiments of the present invention are presented. In a preferred embodiment, as depicted in FIG. 2, base stations  
10 101 and 102 are synchronized to transmit overhead information at approximately the same time. The overhead information is thereby time-aligned and provides an overhead information start time at base stations 101 and 102. Synchronizing the overhead information transmission start times accomplished  
15 via a central clock, such as a Global Positioning System, or via control communications among the base stations.

In an alternate embodiment, as depicted in FIG. 3, remote unit 113 determines when the overhead information is to be transmitted from second base station 102. The base stations  
20 101 and 102 are unsynchronized; however, each base station knows when neighboring stations broadcast their overhead information.

As used herein, overhead information refers to information relating to the communication system. The  
25 overhead information is broadcast to all remote units in the service area of that system. However, the overhead information will vary from one service area to another within the communication system, since the overhead information provides data specific to that service area. Examples of such  
30 information are System ID, Cell Site ID, Paging zone ID and information about neighboring cells. For packet data transmission, this overhead information must include packet zone ID for registration purposes and information about channels in the neighboring cells. This allows the remote unit

to reduce the time it takes to acquire a new channel from another cell.

Remote unit 113 remains at the first base station 101 until a time prior to the transmission of the overhead information start time at second base station 102. Remote unit 113 hands-off in time to receive that overhead information from second base station 102. In this manner, the time it takes remote unit 113 to acquire the overhead information is minimized.

The overhead information among the cell sites and the overhead information on primary and secondary channels within a cell site are staggered by some pre-determined time. The amount of time by which the overhead information data is staggered between the primary and secondary channels equals the sum of time to read the current overhead information and the time to acquire the second channel by the remote unit 113. Other time durations may be used by systems depending on the hand-off method used by that particular system.

The following is a description, in accordance with the preferred embodiment, of how a remote unit moves to the primary packet channel of the target site, reads the overhead information and moves further to a secondary packet channel which will be used for user data transfer. As shown in FIG. 4, the remote unit determines (401) that it needs to hand-off. The remote unit chooses an appropriate time to move from the first base station to the second base station. The remote unit will preferably move from the current channel of the first base station to the primary packet channel of the second base station. Since overhead information on the first base station and the second base station is staggered by a known amount of time, the remote unit initiates (402) hand-off such that the remote unit acquires and arrives on the primary packet channel of the second base station when the overhead information on the second base station is about to be transmitted. This is done by determining a transition time ( $t_{acq}$ ) for the remote



unit, the transition time being the time it takes the remote unit to transition from the first base station to the second base station. Thus, if overhead information on the target channel is available at time  $T_{02}$ , the remote unit initiates hand-off at  $t_{acq}$  seconds prior to  $T_{02}$ . The remote unit 113 reads and processes (403) the overhead information. The remote unit then determines (404) whether it should stay on the primary packet channel or if it should move to the secondary packet channel. If permitted, the remote unit receives (405) data service on the primary packet channel. However, the remote unit may determine that it needs to acquire a secondary packet channel to utilize the packet data service. The primary channel overhead information start time of the primary channel is transmitted at a first time. The secondary channel overhead information start time of the secondary channel is transmitted at a second time. The remote unit acquires (406) the secondary packet channel. The remote unit transitions from the primary channel to the secondary channel based on overhead information transmitted by the primary channel. The secondary packet channel provides (407) overhead information to the remote unit immediately upon arrival.

From the above example, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention. A system may require that a remote unit read the overhead information from a channel other than the primary packet channel first. The remote unit will be directed to a packet channel by this information.

Thus, the present invention provides a method of handing-off a remote unit from a first base station to a second base station. By handing-off the remote unit determining the overhead information start time at the second base station, the remote unit can hand-off to the second base station in time to receive the start of the next overhead information transmission. In this manner, the remote unit hands-off to the

second base station in an efficient manner. The remote unit therefore hands-off in an efficient manner so as to begin hearing overhead information at the second base station without delay.

5        Further, the present invention keeps the amount of overhead information transmitted to a minimum on the channels that broadcast overhead information. The present invention also allows for network configuration changes, which result in overhead message changes being delivered to the  
10       remote units in a timely manner. The present invention can be used for any channel that is being shared by remote units, such as control and access channels.

15       Although the present invention has been described with respect to a Personal Digital Cellular (PDC) system, the present invention can also be used in any wireless system that performs autonomous hand-off and reads overhead information from more than one channel during the hand-off process. For example, the present invention can be utilized in Code Division Multiple Access (CDMA) systems, Time Division Multiple Access  
20       (TDMA) systems, Cellular Digital Packet Data (CDPD) systems, Group Special Mobile (GSM) systems, next generation CDMA systems, and the next-generation CDMA protocols, including direct sequence spread spectrum or slow frequency hopping spread spectrum systems.

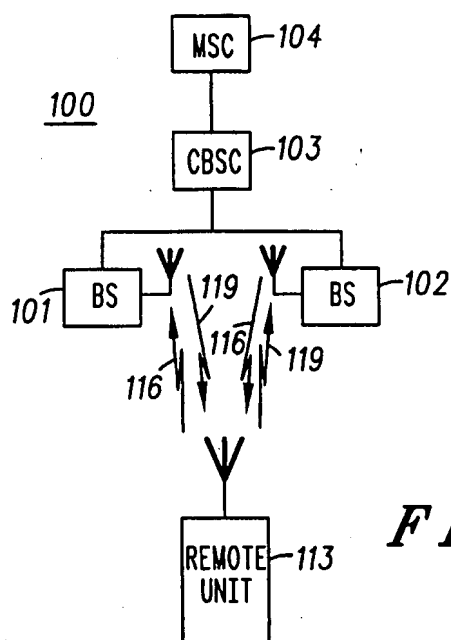
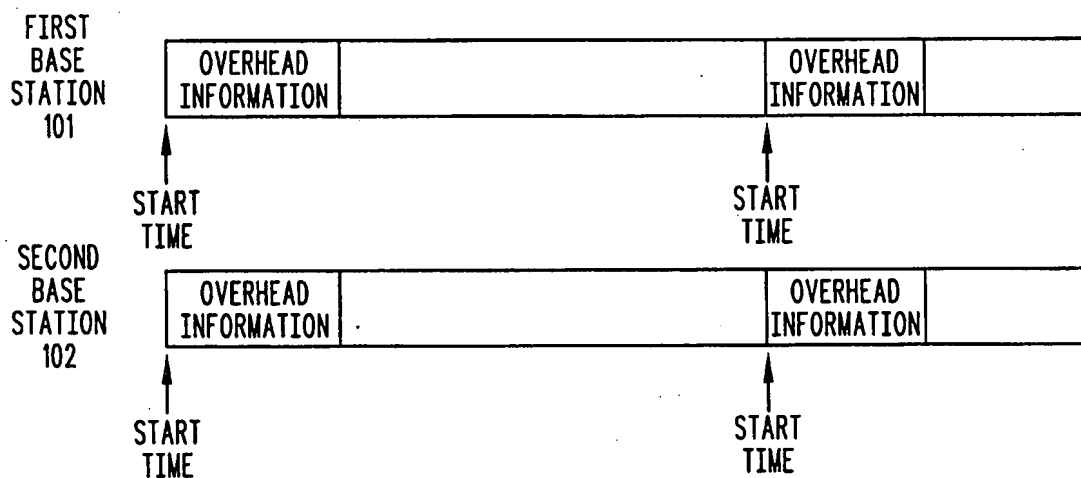
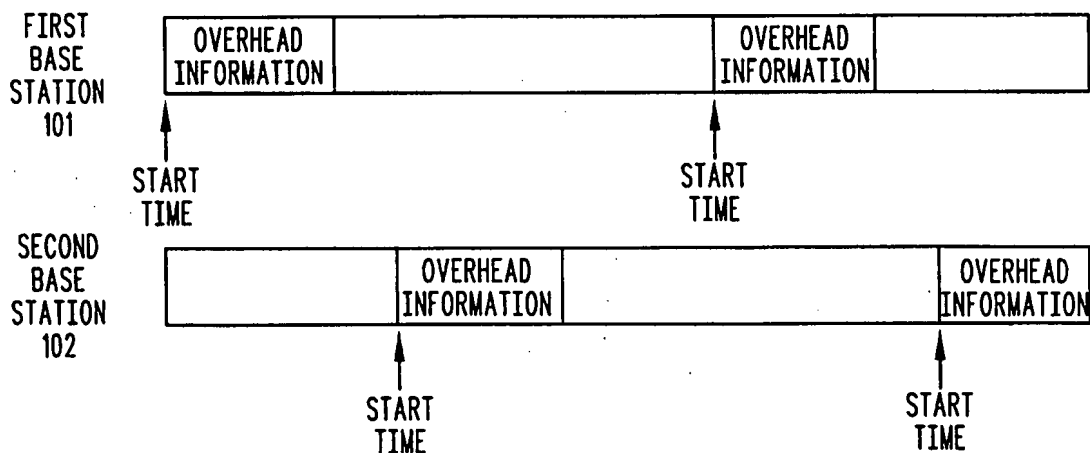
25       While this invention has been described in terms of certain examples thereof, it is not intended that it be limited to the above description, but rather only to the extent set forth in the claims that follow.

We claim:

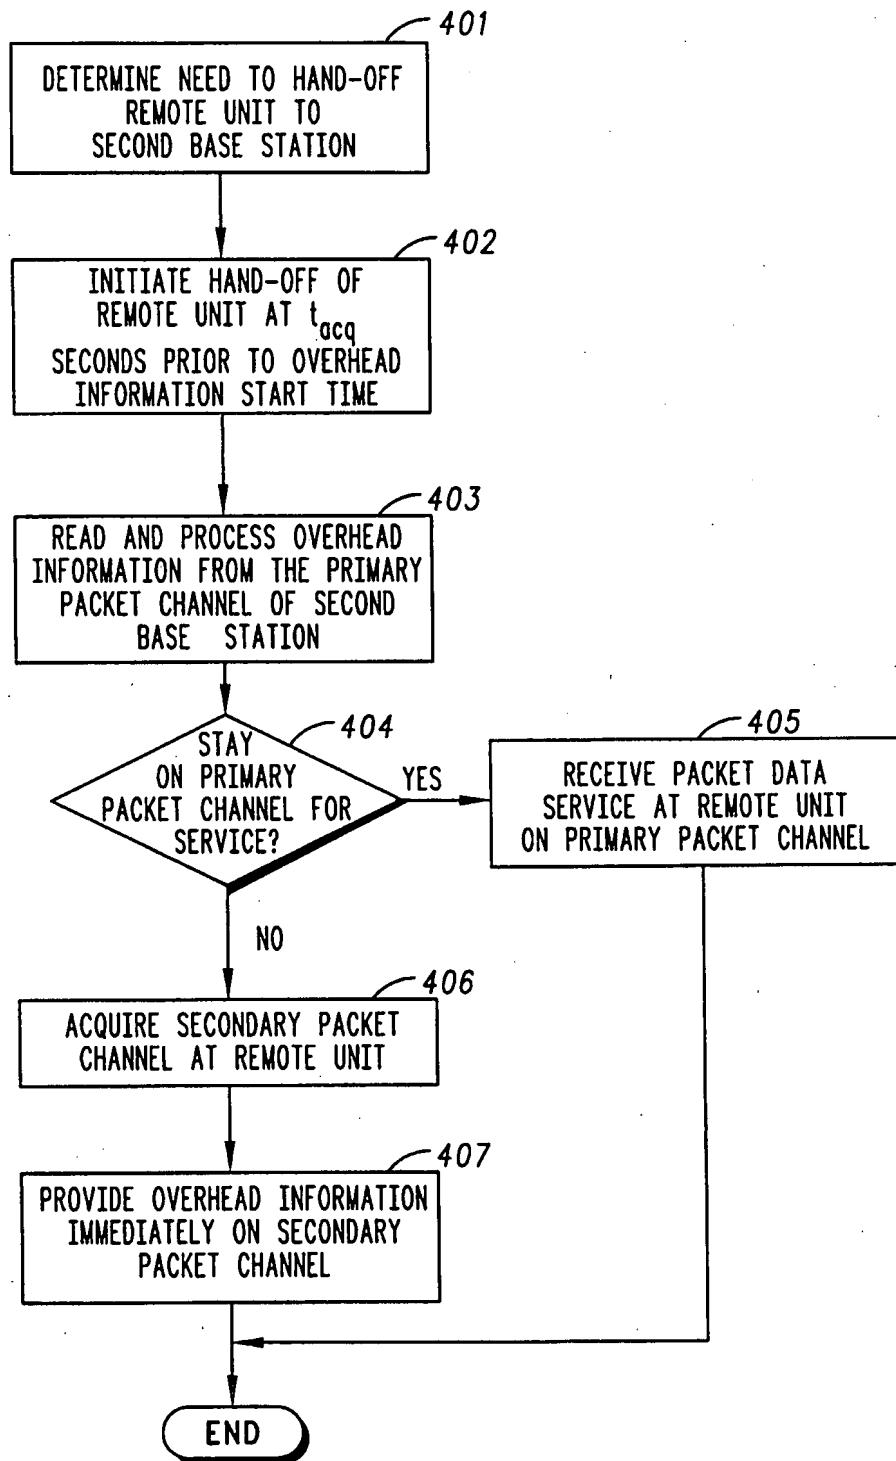
1. A method of handing-off a remote unit from a first base station to a second base station, the method comprising:
  - communicating by the remote unit with the first base station;
  - determining a need to hand-off the remote unit to the second base station;
  - 10 determining an overhead information start time, the overhead information start time being when overhead information will be transmitted from the second base station; and
  - handing-off the remote unit to the second base station
  - 15 based upon the overhead information start time.
2. A method of handing-off a remote unit in accordance with claim 1, further comprising the step of determining a transition time, the transition time being the time it takes the remote unit to transition from the first base station to the second base station.
- 20 3. A method of handing-off a remote unit in accordance with claim 2, wherein the step of handing-off the remote unit further comprises handing-off the remote unit to the second base station based upon the transition time.
4. A method of handing-off a remote unit in accordance with claim 1, wherein the step of determining a need to hand-off the remote unit comprises determining the need at the remote unit.
- 30 5. A method of handing-off a remote unit in accordance with claim 1, wherein the step of determining an overhead information start time comprises determining an overhead information start time at the remote unit.
- 35

6. An apparatus to facilitate hand-off of a remote unit from a first base station to a second base station in a communication system, the apparatus comprising a logic unit determining an  
5 overhead information start time, the overhead information start time comprising when overhead information will be transmitted at the second base station, and handing-off the remote unit to the second base station based upon the overhead information start time.
- 10
7. An apparatus in accordance with claim 6, wherein the remote unit includes the logic unit.
8. An apparatus in accordance with claim 6, wherein the first  
15 base station includes the logic unit.
9. An apparatus in accordance with claim 6, wherein the second base station includes the logic unit.

1 / 2

**FIG. 1****FIG. 2****FIG. 3**

2 / 2



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/16656

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04Q 7/00

US CL : 370/331; 455/437,439

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/328,332,331; 455/436,437,438,439

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,633,872 A (DINKINS) 27 MAY 1997 (27.05.97), lines 38-47, col.11; lines 33-37, col.12; lines 37-67, col.9; lines 1-46, col.10; figs. 9A, 9B.	1,4-9
A	US 5,159,593 A (D'AMICO ET AL.) 27 OCTOBER 1992 (27.10.92), see entire reference.	1-9
A	US 5,388,101 A (DINKINS) 07 FEBRUARY 1995 (07.02.95), see fig.1.	1-9
A	US 5,392,353 A (MORALES) 21 FEBRUARY 1995 (21.02.95), see entire reference.	1-9

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 27 SEPTEMBER 1998	Date of mailing of the international search report 17 NOV 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer AJIT PATEL <i>Diane Smith</i> Telephone No. (703) 308-5347

Form PCT/ISA/210 (second sheet)(July 1992)\*